



Hi-Flo 6 Filters

Models 60 to 120

Technical Sheet




General

Hi-Flo 6 Culligan Filters are designed to respond to industrial proposes.

They are controlled by diaphragm valves opening and closing singly to direct the water flow during service and backwash steps. A timer activates a pilot valve which opens and closes the diaphragm valves.

Backwash is automatically started by an electronic programmer, at any time of the day or night, on any day of the week. It can also be started manually and the filter will automatically resume service at the end of backwash step.

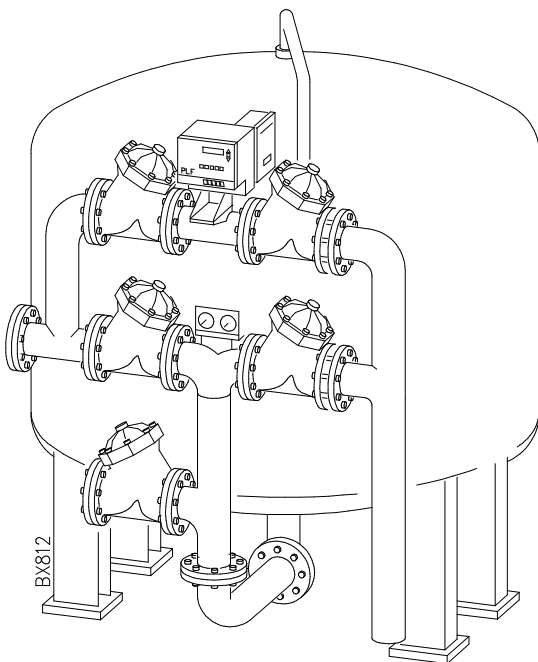


The filter tanks are internally protected by a controlled thickness of epoxy paint, and externally coated with a neutral synthetic enamel.

Culligan Hi-Flo and TWIN Filters cover any requirements for mechanical filtration and for chemico-physical filtration obtained by means of filtering layers.

The processes employed in Hi-Flo and TWIN Filters are:

- **Filtr-Cleer (UF)**, to remove any kind of turbidity from the water, and small quantities of Iron and Manganese; the Minerals utilized are anthracite and silica, chemically inert and of unlimited life.
- **Cullar (UR)**, to remove undesirable odour, taste and colours, as well as excess Chlorine. Cullar is a granular form of activated carbon.
- **Cullneu (UU)**, to neutralize acid water. Cullneu is a granular mineral of Calcium carbonate that dissolves in proportion to the neutralized acidity.
- **Super Iron (UFP)**, for selective Iron and Manganese removal UFP Mineral has a strong catalising effect, enhanced by the injection of a proper chemical.

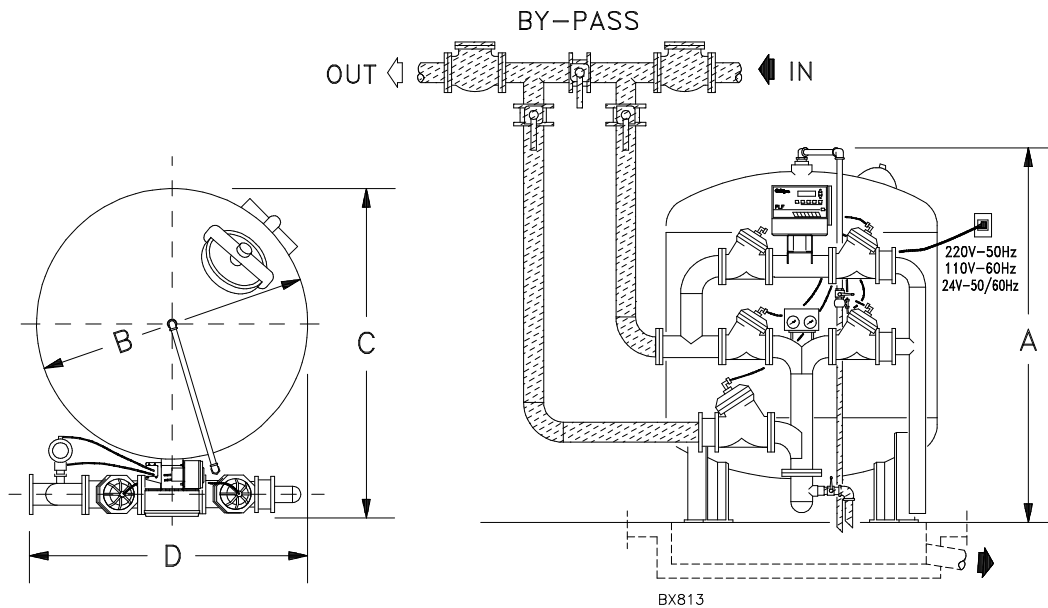

M004-11 – Rev. 02 – 09/2013

TECHNICAL SPECIFICATIONS

Models	Flow Rates			Total washing drain m ³	Max pressure loss bar	In/Out Fitting dia.	Weight		Overall Dimensions				
	Service min. m ³ /h	Service max. m ³ /h	Backwash m ³ /h				Operating kg	Shipping kg	A mm	B dia. mm	C mm	D mm	
FILTR-CLEER (turbidity)													
UF 60	21,7	36,2	61,3	13,5	1	DN 80 (3")	4640	3290	2060	1500	1760	1500	
UF 72	31,2	52	90,8	18	1	DN 100 (4")	6455	4655	2140	1800	2150	1800	
UF 84	42,2	70,4	129,4	28	1	DN 100 (4")	8325	5825	2300	2100	2450	2100	
UF 90	49	81,6	147,7	32,5	1	DN 100 (4")	12250	7250	2350	2300	2630	2300	
UF 100	60,7	101,2	174,9	38,5	1	DN 150 (6")	13445	9145	2320	2500	2950	2500	
UF _e 100	60,7	101,2	174,9	38,5	1	DN 100 (4")	13445	9145	2210	2500	2850	2500	
UF 120	87	145	250	53,5	1	DN 150 (6")	27000	15500	2850	3000	3490	3000	
CULLAR (taste-odour-colour)													
UR 60	21,7	36,2	27,3	6,5	0,3	DN 80 (3")	4395	2795	2060	1500	1760	1500	
UR 72	31,2	52	40,9	9,5	0,3	DN 80 (3")	6025	3875	2140	1800	2100	1800	
UR 84	42,2	70,4	52,2	12	0,3	DN 100 (4")	8190	5190	2300	2100	2450	2100	
UR 90	49	81,6	65	15	0,3	DN 100 (4")	11200	6080	2350	2300	2630	2300	
UR 100	60,7	101,2	79,5	18	0,3	DN 100 (4")	12250	7750	2210	2500	2850	2500	
UR 120	87	145	114	26	0,3	DN 150 (6")	25000	13400	2850	3000	3490	3000	
SUPER IRON (Iron and Manganese)													
UFP 60	15,9	28	52,2	13,5	0,8	DN 80 (3")	4800	3310	2060	1500	1760	1500	
UFP 72	27,3	40	68	18	0,8	DN 100 (4")	6750	4750	2140	1800	2150	1800	
UFP 84	36,3	52	95,5	28	0,8	DN 100 (4")	8600	6100	2300	2100	2450	2100	
UFP 90	42,3	58	114	32,5	0,8	DN 100 (4")	12500	7500	2350	2300	2630	2300	
UFP 100	52,2	79	143	38,5	0,8	DN 150 (6")	12900	9500	2320	2500	2950	2500	
UFPe 100	52,2	79	143	38,5	0,8	DN 100 (4")	12900	9500	2210	2500	2850	2500	
UFP 120	73,5	112	200	53,5	0,8	DN 150 (6")	27250	15750	2850	3000	3490	3000	
CULLNEU (acidity)													
UU 60	-	22,7	61,3	13,5	0,5	DN 80 (3")	4640	3290	2060	1500	1760	1500	
UU 72	-	32,7	90,8	18	0,5	DN 100 (4")	6455	4655	2140	1800	2150	1800	
UU 84	-	40,9	129,4	28	0,5	DN 100 (4")	8325	5825	2300	2100	2450	2100	
UU 90	-	47	147,7	32,5	0,5	DN 100 (4")	12250	7250	2350	2300	2630	2300	
UU 100	-	59	174,9	38,5	0,5	DN 150 (6")	13445	9145	2320	2500	2850	2500	
UU _e 100	-	59	174,9	38,5	0,5	DN 100 (4")	13445	9145	2210	2500	2850	2500	
UU 120	-	80	250	53,5	0,5	DN 150 (6")	27000	15500	2850	3000	3490	3000	

- Power supply: 110-230-24V~/50-60Hz.

Culligan reserves the right to change any technical or design specifications